

TECHNICAL DATA SHEET


Mixed polyolefins regranulate

Origin: Post-consumer.
Caps/closures from used beverage cartons (e.g. Tetra Pak, Elopak, SIG Combibloc).

Recycled content: 100%

Recycling process: Dry cleaning, sorting of caps from foils, wet cleaning of caps and regranulation with melt filtration.

Location: Sokolov, Czech Republic

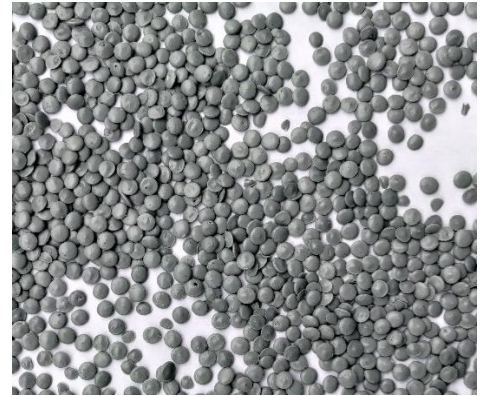

Primary information	Indicative Value ¹	Method of measurement
Colour	grey	
Granule diameter	4 mm	
Filter size in extrusion	230 µm	
Material composition	45% HDPE, 35% LDPE, 15-20% PP	
Inorganic content	1.1 %	ISO 11358-1
Density	0.95 g/cm ³	ISO 1183
Smell/odour	0	Score (0 – no odour to 3 – strong odour)
MFI	7,5 g/10mins	ISO 1133 (190 °C; 2,16kg)
Tensile modulus	720 MPa	ISO 527-2
Tensile strength	17.8 MPa	ISO 527-2
Elongation at yield	7.9 %	ISO 527-2
Elongation at break	8.2 %	ISO 527-2
Flexular modulus	680 MPa	ISO 178
Impact strength	3.4 kJ/m ²	ISO 798-1 Charpy notched
Shore D hardness	57.5	ISO 868 after 15 s

¹ Data should not be used for specification work.